

Coaxial cable RG

COAXIAL CABLE

■ TECHNICAL DATA

Conductor: Silver Copper


Insulation: PTFE

Temperature Range: -55°C ~ +200°C

Colour: White-Transparent or other

type of RF coaxial cable for radio communications

equipment and other similar high-frequency transmission technology using electronic devices.

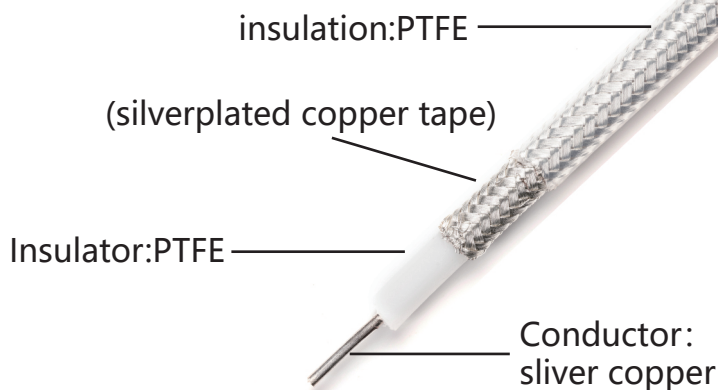

■ PRODUCT PARAMETER

Type	Conductor Construction NO.XΦ mm	Outer Diameter	Shield	Outer Diameter mm	Standard Property Resistance Ω	Attenuation Coefficient ≤ d B/m	Max. Operating Voltage
RG178	7/0.10	0.86	Single Braid	1.83	50	2.572	1000
RG178FEP	7/0.10	0.86	Single Braid	1.83	50	2.572	1000
RG316	7/0.17	1.52	Single Braid	2.5	50	1.532	1200
RG316D	7/0.17	1.52	Double Braid	2.9	50	1.532	1200
RG393	7/0.80	7.24	Double Braid	9.91	50	1.089	5000
RG142	1/0.94	2.95	Double Braid	4.95	50	1.05	1900
RG141	1/0.94	2.95	Single Braid	4.83	50	1.05	1900
RG304	1/0.50	4.7	Double Braid	7.11	50	0.755	3000
RG179	7/0.10	1.6	Single Braid	2.54	75	0.869	1200
RG179FEP	7/0.10	1.6	Single Braid	2.54	75	0.875	1200
RG302	1/0.64	3.71	Single Braid	5.13	75	0.666	2300
RG303	1/0.94	2.95	Single Braid	4.32	70	0.781	1900
RG180	7/0.10	2.59	Single Braid	3.56	95	0.676	1500