

Coaxial cable SFF

COAXIAL CABLE

■ TECHNICAL DATA

Conductor: Silver Copper


Insulation: PTFE

Temperature Range: -55°C ~ +200°C

Colour: White-Transparent or other

type of RF coaxial cable for radio communications

equipment and other similar high-frequency transmission technology using electronic devices.

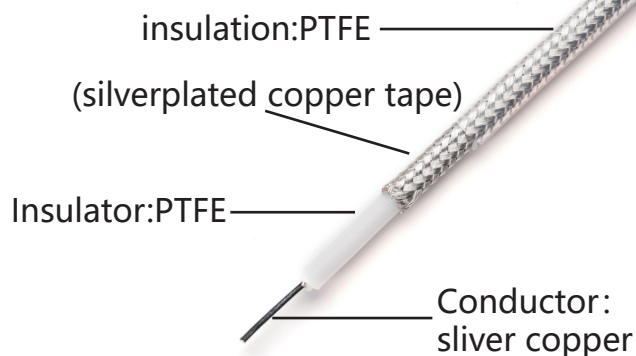

COAXIAL CABLE

■ PRODUCT PARAMETER

Type	Conductor Construction NO.XΦmm	Outer Diameter	Shield	Outer Diameter mm	Standard Property Resistance Ω	Attenuation Coefficient ≤ d B/m			Max. Operating Voltage
						30MHZ	200MHZ	300MHZ	
SFF-50-1	7/0.10	0.87	Single Braid	1.8	50	0.33	0.85	3.4	1.2
SFF-50-1.5-1	7/0.18	1.5	Single Braid	2.55	50	0.19	0.52	2	2
SFF-50-1.5-2	7/0.18	1.5	Double Braid	3.2	50	0.19	0.52	2	2
SFF-50-2-1	1/0.73	2.2	Single Braid	3.3	50	0.12	0.31	1.27	3
SFF-50-2-1	1/0.73	2.2	Double Braid	4	50	0.12	0.31	1.27	3
SFF-50-2-2	1/0.93	3	Single Braid	4.5	50	0.09	0.23	0.95	4.2
SFF-50-3-1	1/0.93	3	Double Braid	5.5	50	0.09	0.23	0.95	4.2
SFF-50-3-2	1/1.48	4.6	Single Braid	6.4	50	0.06	0.15	0.67	6.5
SFF-50-5	1/0.17	0.87	Single Braid	1.8	75	0.28	0.74	2.9	1
SFF-75-1	7/0.10	1.5	Single Braid	2.55	75	0.2	0.52	2	1.8
SFF-75-1.5-2	7/0.10	1.5	Double Braid	3.2	75	0.2	0.52	2	1.8
SFF-75-3-1	1/0.55	3	Single Braid	4.5	75	0.09	0.23	0.95	3.6
SFF-75-3-2	1/0.55	3	Double Braid	5.5	75	0.09	0.23	0.95	3.6
SFF-75-5	1/0.55	4.6	Single Braid	6.4	75	0.06	0.15	0.66	5.5