

FVLP PVC plane lacquer shielded wire

PLANE LACQUER WIRE

Pleach: _____
fiberglass

■ TECHNICAL DATA

Insulation:PVC

Conductor:Tinned Copper

Temperature Range:-65°C~ + 105°C

Rated Voltage:450V/750V


O.D.Tolerance:±0.1mm

Colour:White-Blue-Red-Black-Brown-Yellow-Green-Transpanrent-Yellow/Green

Used plan low voltage wiring,high-speed road inductance wiring,lighting lamp,high popl lamp in the road and so on.

Insulator:PVC

Conductor: Tinned
Copper

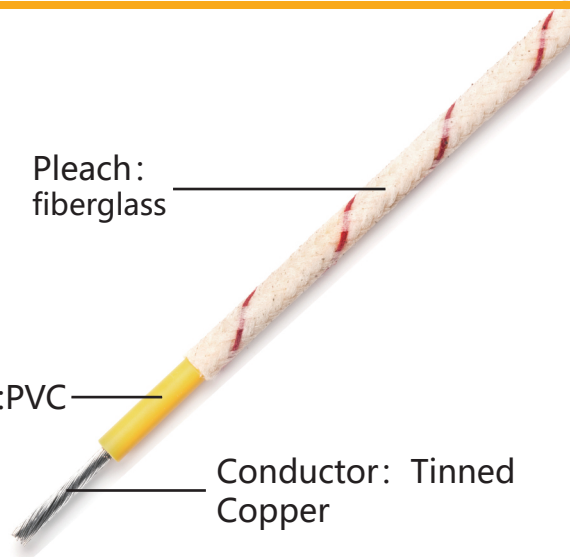

PLANE LACQUER WIRE

■ PRODUCT PARAMETER

Conductor		Insulation			Packing
Sectional Area mm ²	Conductor Construction NO.XΦmm	Insulation Thickness mm	Pleach Thickness mm	Outer Diameter mm	M/coil
0.35	7 x 0.25	0.40	0.50	2.95	200
0.50	7 x 0.30	0.40	0.50	3.20	200
0.75	7 x 0.37	0.40	0.50	3.40	200
0.80	7 x 0.40	0.40	0.50	3.50	200
1.0	19 x 0.26	0.45	0.50	3.70	200
1.2	19 x 0.28	0.45	0.50	3.70	200
1.5	19 x 0.32	0.50	0.50	3.90	100
2.0	19 x 0.37	0.50	0.50	4.40	100
2.5	19 x 0.41	0.50	0.50	4.50	100
3.0	19 x 0.45	0.50	0.50	4.75	100
4.0	49 x 0.32	0.50	0.50	5.40	100
5.5	49 x 0.36	0.50	0.50	5.74	100
6.0	49 x 0.39	0.50	0.50	6.00	100
8.0	49 x 0.45	0.60	0.50	6.75	100
10.0	49 x 0.52	0.60	0.50	7.38	100
16.0	49 x 0.64	0.60	0.50	8.40	100
25.0	98 x 0.58	0.60	0.50	10.2	100
35.0	133 x 0.58	0.60	0.50	11.5	100