

Nylon coated wire FVN

NYLON JACKET WIRE

■ TECHNICAL DATA

Insulation:PVC

Conductor:Tinned Copper


Temperature Range:-65°C~ + 105°C

Rated Voltage:600V

O.D.Tolerance:±0.1mm

Colour:White-Blue-Red-Black-Brown-Yellow-Green-Transparennt-Yellow/Green

Used plan low voltage wiring,high-speed road inductance wiring,lighting lamp,high popl lamp in the road and so on.

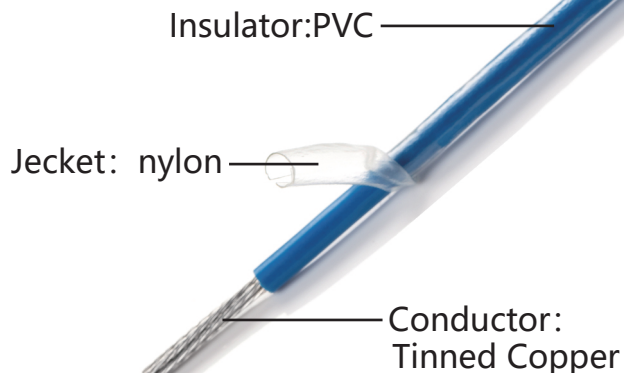

NYLON JACKET WIRE

■ PRODUCT PARAMETER

Conductor		Insulation			Packing
Sectional Area mm ²	Conductor Construction NO.XΦmm	Insulation Thickness mm	Pleach Thickness mm	Outer Diameter mm	M/coil
0.2	12 x 0.15	0.35	0.15	1.60	200
0.3	16 x 0.15	0.35	0.15	1.70	200
0.4	23 x 0.15	0.35	0.15	1.90	200
0.5	28 x 0.15	0.35	0.15	1.95	200
0.6	19 x 0.20	0.35	0.15	2.00	200
0.75	19 x 0.23	0.35	0.15	2.15	200
1.0	19 x 0.26	0.35	0.15	2.30	200
1.2	19 x 0.28	0.40	0.15	2.60	100
1.5	19 x 0.32	0.40	0.15	2.70	100
2.0	19 x 0.37	0.40	0.15	3.00	100
2.5	49 x 0.26	0.40	0.15	3.55	100
3.0	49 x 0.28	0.45	0.15	3.70	100
4.0	77 x 0.26	0.45	0.15	4.30	100
5.0	98 x 0.26	0.45	0.18	4.70	100
6.0	77 x 0.32	0.50	0.18	5.10	100
8.0	98 x 0.32	0.50	0.18	5.60	100
10.0	126 x 0.32	0.50	0.18	6.20	100
13.0	133 x 0.36	0.60	0.22	7.10	100
16.0	209 x 0.32	0.60	0.22	7.80	100
20.0	247 x 0.32	0.60	0.22	8.40	100
25.0	209 x 0.39	0.60	0.22	9.20	100
35.0	285 x 0.39	0.60	0.22	10.4	100